

# Development Model for Supply Chain Network Design by Demand Uncertainty and Mode Selection

I. Rahimi, M. T. Askari\*, S. H. Tang, L. S. Lee, S. Azfanizam Binti Ahmad, Adel M. Sharaf

**Received:** 19 July 2015;

**Accepted:** 27 November 2015

**Abstract** It is necessary to consider the impact of demand uncertainty to model the comprehensive approach for supply chain network design. This paper presents four echelons, multiple commodity, and strategic-tactical model for designing supply chain network. Uncertain demand, transportation mode selection with lead time configuration has been considered. A numerical example has been implemented to verify the applicability of model. Finally, the simulation results and sensitivity analysis confirm that the proposed developed model is a suitable decision framework for designing the supply chain network.

**Keywords:** Supply Chain Network Design, Mode Selection, Demand Uncertainty.

## 1 Introduction

Facility location has been considered as a suitable research in the field of operations research, which are considered as a branch of decision making policies [1]. According to many research papers and books. Even American Mathematics Society (AMS) has created special codes for facility location and recently European Research Society (EURO) assign special society to this issue. However there are debates about the application of facility models. Conversely, application advantage of logistics has not been considered as an issue. One of the logistic issues which have been considered is supply chain management (SCM). Truly, development of supply chain management (SCM) started from operations research independently, and operations research goes into supply chain management moderately. Melo *et al.* [2] has reviewed facility location models in supply chain management. Tang *et al.* [3] have reviewed about integrating supply chain network. Usually there are three levels of decisions in supply chain management:

---

\* **Corresponding Author.** (✉)

E-mail: [m.asgary28@gmail.com](mailto:m.asgary28@gmail.com)

**I. Rahimi, S. H. Tang, S. Azfanizam Binti Ahmad**

Department of Mechanical and Manufacturing Engineering, Faculty of Engineering, University Putra Malaysia

**M.T. Askari**

Young Researchers and Elite Club, Semnan Branch, Islamic Azad University, Semnan, Iran

**L. S. Lee**

Department of Mathematics, Faculty of Science, 43400 UPM Serdang, Selangor, MALAYSIA.

**Adel M. Sharaf**

Sharaf Energy Systems, Inc, Fredericton, NB, Canada.

Strategic, tactical, and operational. Simchi-Levi *et al.* [4] mentioned that strategic decision has long –term effects on companies. These decisions include: number (quantity), location, capacity of Strategic, Tactical, and Operational. Simchi-Levi *et al.* [4] Mentioned that strategic decision has long –term effects on companies. These decision includes: number, location, capacity of warehouses and plants, or flow of products in logistic systems [5,6].

## Nomenclature

### Index sets:

- I** set of plants
- J** set of warehouses
- P** set of products
- C** set of customers
- S** set of suppliers
- R** set of raw materials
- O** set of capacity of warehouses
- E** set of capacity of plants
- TR** set of available transportation modes

### Parameters

- INV** investment
- F** net profit
- BIG M** a large number
- $PR_p$  Selling price of a unit P to customers
- $PS_{r,s}$  Price of raw material supplied by supplier s
- $MV_{p,tr}$  Monetary value per unit of lead-time for product p in mode tr
- $CO_i^o$  fixed cost of opening plant I with capacity level o;
- $CO1_j^e$  fixed cost of opening warehouse j with capacity level e
- $CU_i^o$  fixed cost of operating plant I with capacity level o;
- $CU1_j^e$  fixed cost of operating warehouse with capacity level e;
- $CS_{p,j}$  storage cost of unit p at warehouse j;
- $CD_{r,s,i}$  transportation cost of product p from supplier to plant I;
- $CT_{p,i,j}$  transportation cost from plant I to warehouse j;
- $CF_{p,j,c}$  transportation cost from warehouse to customer;
- $UC1_{i,j}^{tr}, UC2_{i,j}^{tr}, UC3_{i,j}^{tr}$  Unit fixed cost of using transportation mode tr;
- $A(i, j)$  Number of delivery from plant to warehouse;

### Decision variables

- $X_i^o$  1 if facility active with capacity level o, 0 otherwise;
- $y_j^e$  1 if facility active with capacity level e; 0 otherwise;
- $Z_{i,j}^{t,tr}$  integer decision variable which determines the required number of mode tr for delivery goods between two point a and b;

$f_{r,\alpha,\beta}^{t,tr}$  quantity of product transport between two point with transportation mode  $tr$  at tactical period  $t$ ;

$q_{p,i}^t$  quantity of product produce at plant  $p$  at tactical period  $t$ ;

$h_{p,j}^t$  quantity of product held at warehouse  $j$  at tactical period  $t$ ;

Shapiro[7]. This kind of decision is related to shorter decisions which includes: purchasing and production decisions, demand uncertainty, inventory programming. Finally, operational decisions including lead-time decision, scheduling and shipping products.

**Table 1** review some works according to different characteristics

paper	echelon		Finished product		parameter		capacity	inventor y	Budget constraint	Transportati on mode
	single	multiple	single	multiple	deterministic	Non- deterministic				
Goyal <i>et al.</i> [8]	✓		✓			✓	✓			
arbarosoglu and Özgür[9]	✓			✓	✓			✓		
Sabri and Beamon [10]		✓		✓		✓				✓
Goyal <i>et al.</i> [11]	✓			✓		✓		✓		
You and Grossmann [12]		✓		✓		✓				✓
Tasan [13]	✓		✓		✓		✓			
Goyal and Deshmukh [14]	✓			✓	✓		✓			
Arntzen <i>et al.</i> [15]	✓			✓				✓		
Pirkul and Jayaraman [16]	✓			✓	✓			✓		
Torabi and Hassini [17]		✓		✓		✓				✓
Pirkul and Jayaraman [18]	✓			✓	✓		✓			
Amiri [19]	✓			✓	✓	✓				
Park* [20]	✓			✓	✓	✓				
Lei <i>et al.</i> [21]	✓		✓		✓		✓			
Aghezzaf Carlsson and Rönnqv [22, 23]		✓	✓	✓		✓	✓	✓		
Carlsson and Rönnqv [23]	✓		✓	✓						✓
Chan <i>et al.</i> [24]	✓		✓		✓			✓		
Guillén <i>et al.</i> [25]		✓		✓		✓	✓			
Cordeau <i>et al.</i> [26]		✓		✓		✓				✓
Wilhelm <i>et al.</i> [27]	✓		✓		✓	✓	✓			✓
Proposed model		✓		✓		✓	✓		✓	✓

Usually there are different international transportation modes that include air, rail and water modes. Transportation plays a connection means among several stages that change raw material and resources to finished products. Planning all these function and sub-functions to a system movement can minimize total cost and maximize services for consumers.

Shapiro [7], Cordeau *et al.*[26], Wilhelm *et al.*, Sadjady and Davoudpour [27, 28] are some authors that have shown transportation mode as one of the decisions.

Without considering a well transportation system, logistics system could not play an efficient and effective role. Moreover, a well transportation system could provide logistics

efficiency in logistics activities. An improved transportation system needs the effort of both public and private sectors. A well logistic system may increase competitiveness at both public and private sectors.

Demand very short lead-time for customers is another important task must be consider during transportation. Typically customers would like to receive their demands with shortest time. In this paper we will discuss the role of capacity of warehouses for delivery lead time.

Uncertain parameter in supply chain network design models is another important characteristic. The uncertainties can be classified into two groups and they are random or stochastic, and non-random or strategic uncertainties.

Aghezzaf [22], Chan *et al.*[24], Snyder [29], Longinidis and Georgiadis [30, 31] are some authors which has worked on uncertain demands. In this paper we will discuss about uncertain demand with Monte Carlo method. Monte Carlo methods are based on computing algorithm using repeated random number to compute results. These methods are suitable when we cannot gain exact or result with deterministic model.

This paper considers different transportation mode selection and uncertain demand with the application of Monte Carlo method.

Remainder of this paper is below:

Section 2 proposes model, section 3 explain model with numerical example using Cplex solver with sensitive and scenario analysis. Section 4 implies conclusion.

## **2 Proposed model**

### **2.1 Problem statement**

This study is the extension of the research which was done by Bashiri *et al.* [32], In this section a mixed integer linear programming model is introduced. This model is four echelons (suppliers, plants, warehouses, and customers). Each supplier provides multi raw materials and sends them to several plants with different transportation modes. Each plant produces multi commodity and then send them to warehouses with different transportation modes. Now warehouses that consider lead-time send different products with different transportation modes to retailers. Demands of retailers are not deterministic and follow Monte Carlo function. Two different decisions are made in this model: strategic and tactical decisions. Two main contributions are the different transportation modes that provide different lead-time and uncertain demand which are considered in Monte Carlo stochastic programming.

### **2.2 Assumptions**

- 1-An open plant or warehouse cannot be closed during planning.
- 2- A facility install with its capacity that cannot be changed during planning.
- 3-Each supplier has limitation on raw materials capacity and availability.
- 4-Transfers are banned between plants and warehouses.
- 5-Only on yearly time period that has been considered for planning.

### **2.3 Decisions**

- 1-Supplier and raw material selection from suppliers to customers

2-Quantity of products that produce at plants and transfer to warehouses, and from warehouse to customers with lead-time consideration.

3-Decision about location of establishing new facilities.

4-Decision about transportation mode between sites.

### 3 Model formulation

$$\max imization F = \sum \sum \sum \sum \sum PR_p \cdot f_{p,j,c}^{t,tr} \quad (1)$$

$$- \sum \sum CO_i^o \cdot X_i^o - \sum \sum CO_j^e \cdot y_j^e - \sum \sum CU_j^e \cdot y_j^e \quad (2)$$

$$- \sum \sum CU_i^o \cdot x_i^o - \sum \sum \sum cp_{p,i} \cdot q_{p,i}^t \quad (3)$$

$$- \sum \sum \sum \sum CS_{p,j} \cdot (h_{p,j}^t + \sum f_{p,i,j}^{t,tr} / 2 * A(i,j)) \quad (4)$$

$$- \sum \sum \sum \sum CD_{r,s,i} \cdot f_{r,s,i}^{t,tr} \quad (5)$$

$$- \sum \sum \sum \sum \sum CT_{p,i,j} \cdot f_{p,i,j}^{t,tr} \quad (6)$$

$$- \sum \sum \sum \sum \sum CF_{p,j,c} \cdot f_{p,j,c}^{t,tr} \quad (7)$$

$$- \sum \sum \sum \sum \sum PS_{r,s} \cdot f_{r,s,i}^{t,tr} \quad (8)$$

$$- \sum \sum \sum MV_{p,tr} \cdot TPW_{p,j,c}^{tr} \cdot f_{p,j,c}^{t,tr} \quad (9)$$

$$- \sum \sum \sum \sum UC1_{i,j}^{tr} \cdot Z_{i,j}^{t,tr} \quad (10)$$

$$- \sum \sum \sum \sum UC3_{j,c}^{tr} \cdot Z_{j,c}^{t,tr} \quad (11)$$

$$- \sum \sum \sum \sum UC2_{s,i}^{tr} \cdot Z_{s,i}^{t,tr} \quad (12)$$

Equations (1) to (12) are related to net income; constraint (1) calculates total revenue of net income. Constraint (2) to (3) shows cost of opening and operating plants and warehouses, and cost of producing products at plants. Storage cost at warehouses has been shown in constraint (4). Constraints (4) to (7) are related to transportation cost from supplier to plant, plant to warehouses and warehouses to customers. Constraint (8) shows raw material supplier cost. Constraint (9) implies delivery lead time cost from warehouse to customer. Constraints (10) to (12) imply fixed cost of using transportation cost from supplier to plant, plant to warehouse, and warehouse to customers.

### 3.1 Constraints

$$\sum_j f_{p,j,c}^{t,tr} \leq D_{p,c}^t \quad (13)$$

$$\sum_i f_{p,i,j}^{t,tr} + h_{p,j}^{t-1} = \sum_c f_{p,j,c}^{t,tr} + h_{p,j}^t \quad (14)$$

$$\sum_s f_{r,s,i}^{t,tr} = \sum_r b(r,p) \cdot q_{p,i}^t \quad (15)$$

$$q_{p,i}^t = \sum_j f_{p,i,j}^{t,tr} \quad (16)$$

$$\sum_p v_p \cdot (h_{p,j}^t + \sum f_{p,i,j}^{t,tr} / 2 * A(i,j)) \leq \sum_e Mk_j^e \cdot y_j^e \quad (17)$$

$$\sum_i f_{r,s,i}^{t,tr} \leq z_{s,r}^t \cdot rs_{s,r}^t \quad (18)$$

$$\sum_i f_{r,s,i}^{t,tr} \geq MO_{s,r} \cdot z_{s,r}^t \quad (19)$$

$$\sum_o \sum_i CO_i^o \cdot x_i^o + \sum_e \sum_j CO_j^e \cdot y_j^e \leq INV \quad (20)$$

$$\sum_c \sum_p f_{p,j,c}^{t,tr} \leq \sum_j y_j^e \cdot BIGM \quad (21)$$

$$\sum_o x_i^o \leq 1 \quad (22)$$

$$\sum_e y_j^e \leq 1 \quad (23)$$

$$\sum_r f_{r,s,i}^{t,tr} \leq cap_{s,i}^{tr} \cdot z_{s,i}^{t,tr} \quad (24)$$

$$\sum_p f_{p,i,j}^{t,tr} \leq cap_{i,j}^{tr} \cdot z_{i,j}^{t,tr} \quad (25)$$

$$\sum_p f_{p,j,c}^{t,tr} \leq cap_{j,c}^{tr} \cdot z_{j,c}^{t,tr} \quad (26)$$

$$\sum_{tr} z_{i,j}^{t,tr} \leq A(i,j) \quad (27)$$


Constraint (13) implies the demand for each customer and for each transportation mode. There is no need to satisfy all demand requirements of customers. Constraint (14) shows that quantity of products that transfer from plants to warehouses at tactical period plus quantity of product that store at previous tactical period is equal to quantity of product store at the current tactical period plus quantity of product that transfer from warehouses to customer. Constraint (15) states that quantity of product that is transferred from supplier to plant is equal to the requirement of product that is necessary for production at plants. Constraint (16) states that quantity of product produced at each plant is equal to quantity of products transport from each

plant to warehouses for each tactical period and each transportation mode. Constraint (17) illustrates warehouses could not be allowed to store more than their capacity. Supplier does not allow to deliver more than their capacity to plants, constraint (18). Constraint (19) depicts avoiding providing each material less than a prerequisite minimum amount of the quantity which deliver from each supplier to plant. Constraint (20) shows cost of opening plant and warehouses must not be more than its budget. Constraint (21) shows that only open warehouses could transport product to customers. Constraint (22) and (23) illustrates that in each potential site has a maximum of one plant and warehouse location. Constraint (24) to (26) show capacity limits on quantity of product transport between two sites for each mode. Constraint (27) shows that total number of modes between plant and warehouses is less than total number of delivery.

## 4 Results

### 4.1 numerical examples

In this step we run our model with different scenario on investment. It is clear from the figure 1 below that, after 4000 investing, profit is constant without any changes. Thus, we can run our model.

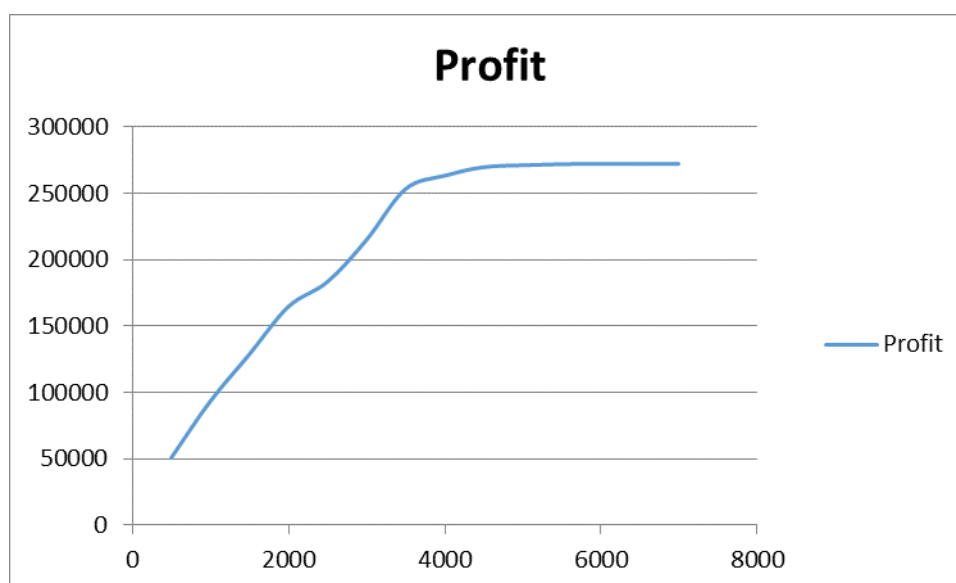

**Fig. 1** Investment vs. profit net

In this step we generate the structure of model as below:

Number of supplier: 8

Number of products: 10 Number of raw materials: 10

Number of plants: 10

Number of warehouses: 19

Capacity options: 4

Number of customers: 10

Transportation modes: 2

Data generator commands running in excel are in appendix A. Result show three plants (plants number 7, 9, 10) with three capacities (capacity 1, 3 and 4), and 7 warehouses (warehouse number 2, 3, 6, 10, 11, 12, 16) with three capacities (capacity 1, 2, 3) should be established. These results have been shown in table 2 and 3.

**Table 2** Selected plants with consideration capacity options

plant	capacity1	capacity2	capacity3	capacity4
plant1				
plant2				
plant3				
plant4				
plant5				
plant6				
plant7				
plant8				
plant9				
plant10				

**Table 3** Capacity options for warehouses

	capacity1	capacity2	capacity3	capacity4
WH1				
WH2				
WH3				
WH4				
WH5				
WH6				
WH7				
WH8				
WH9				
WH10				
WH11				
WH12				
WH13				
WH14				
WH15				
WH16				
WH17				
WH18				
WH19				

Three raw materials (r6, r7, and r 10) by seven suppliers (s1, s3, s5, s6, s7, s8) have been provided (table 4).



**Table 4** raw materials provided by suppliers

Column1	supplier1	supplier2	supplier3	supplier4	supplier5	supplier6	supplier7	supplier8
plant1								
plant2								
plant3	r7		r4,r8			r1,r6	r2,r3,r5,r9,r10	r6
plant4	r7		r4,r8			r1,r6	r2,r3,r5,r9,r10	r6
plant5								
plant6	r7		r4,r8			r1,r6	r2,r3,r5,r9	r6
plant7	r7		r4,r8			r1,r6	r2,r3,r5,r9	r6
plant8	r7		r4,r8			r1	r2,r3,r5,r9,r10	
plant9	r10,r7		r2,r4,r8			r1,r3,r6	r5	r6
plant10	r6,r7		r4,r8		r1		r2,r3,r5,r9,r10	r6

**Table 5** Selected raw materials

	s1	s2	s3	s4	s5	s6	s7	s8
r1								
r2								
r3								
r4								
r5								
r6								
r7								
r8								
r9								
r10								

Table 5 and 6 implies different raw materials that are provided by different plants from suppliers with two transportation modes.

**Table 6** Raw material provided by different suppliers for plants by transportation mode2

Column1	supplier1	supplier2	supplier3	supplier4	supplier5	supplier6	supplier7	supplier8
plant1								
plant2								
plant3	r2,r10		r4			r1,r6	r2,r9,r3	
plant4	r7,r10		r2,r4,r8			r1,r6	r3,r5,r9	
plant5								
plant6								
plant7	r10,r6		r8,r4,r7			r1	r2,r3,r5,r9	
plant8	r10,r6		r8,r4,r7			r1	r2,r3,r5,r9	
plant9	r7		r4,r8			r1,r6	r5,r9,r2,r3,r10	
plant10	r10,r7		r2,r4,r8	r6	r1		r3,r9,r5	

Since our model run with two statuses (stochastic and deterministic demand), we compare both results in table 7.

**Table 7** Deterministic and stochastic demands

demand	deterministic		stochastic	
	Total cost	profit	Total cost	profit
20	-52333	3347	-59431	3120
50	-110715	5190	-122323	4921
70	-275671	5921	-292531	5721
80	-352432	6721	-342131	6542

It is clear from the aforementioned table 7 that when we run our model under uncertain demand, transportation has increased moderately while decreasing profit. However, with the increment of demand, profit is growing up while demand point increased.

#### 4.2 Scenario and sensitive analysis

During model running, it is seen that some constraints and parameters may affect model. By extracting some of these parameters and constraints, different scenarios could be produced.

In this section we try two scenarios:

Scenario 1: Eliminating storage cost

Scenario 2: Eliminating warehouse capacity constraint

To simplify objective functions extract definition as below:

Cost 1 = total transportation cost;

Cost 2 = transportation cost from warehouse to customer;

Cost 3 = delivery lead time cost;

Cost 4 = transportation cost from supplier to plant;

Cost 5 = transportation cost from plant to warehouses;


Cost 6 = fixed cost of using different transportation cost;

Cost 7= raw material supply cost;

Cost 8 = fixed cost of opening and operating plant and warehouses;


Cost 9 = cost of producing product at plants;

Cost 10 = storage cost at warehouses;

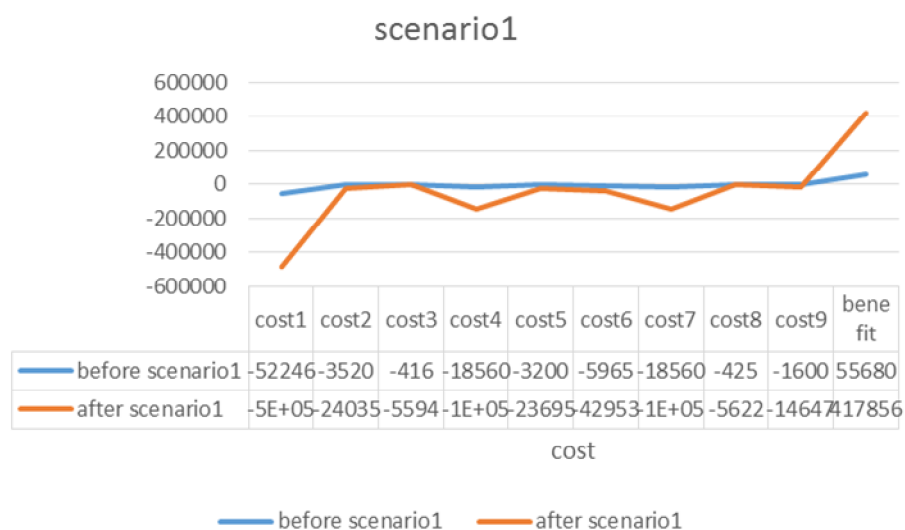

**Fig. 2** scenario 1 results

After scenario 1, it is shown that all cost has been increased while total revenue increases. The main reason for this result is because of the demand. Consequently, benefit of selling prices go up. However, this is not a realistic situation. Result has been shown in figure1.

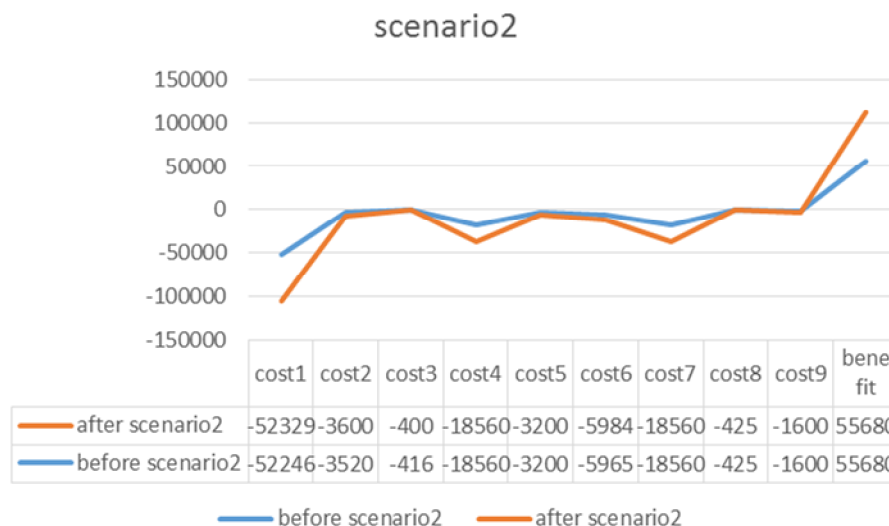

**Fig. 3** scenario 2 results

After scenario 2 it is seen that cost 1, cost 2, cost 6 decreased slowly, while cost 3 increase moderately. Results have been shown in figure2.

## 5 Sensitive analysis

### 5.1 Expansion capacities of warehouses

In this section total performance of model is checked. We expand capacity of warehouses from 1000 to 3500 in a step by step manner to monitor fluctuation of other costs and benefits. The costs are checked based on capacity fluctuations. It is clear from table 8, cost of opening and operating plant and warehouses, and cost of transportation between plant and warehouses are constants. Table 8 depicts the aforementioned results.

**Table 8** Sensitive Analysis

cost	1000	1500	2000	2500	3000	3500
cost1	-52337	-53278	-53179	-52333	-52361	-52469
cost2	-3565	-3560	-3685	-3600	-3585	-3575
cost3	-413	-451	-431	-400	-410	-429
cost4	-18576	-18928	-18848	-18560	-18576	-18624
cost5	-3200	-3200	-3200	-3200	-3200	-3200
cost6	-5973	-5979	-5980	-5980	-5980	-5980
cost7	-18576	-18928	-18848	-18560	-18576	-18624
cost8	-425	-425	-425	-425	-425	-425
cost9	-1609	-1807	-1762	-1600	-1609	-1636
benefit	55708	56324	56184	55680	55708	55792

We extend the structure of problem with 4 different classes (Table 9). As it is shown in Table 10, number of variables, discrete variables, constraints and CPU times increase exponentially.

Our model is NP-hard problem. With the increment of size of problem, some heuristics should be designed to reduce time of solution and finding the optimal solution.

**Table 9** Structure of the test problem

class	supplier	plant	warehouse	transportation mode	customer	raw material
c1	8	10	19	2	10	10
c2	10	15	20	2	15	15
c3	10	15	20	4	15	15
c4	20	25	25	4	30	25

**Table 10** Computational results

class	non-zero elements	discrete variables	constraint	cpu time
s1	63412	11816	2163	0.78
s2	729446	96275	48837	277
s3	1520999	219690	88027	1001
s4	669446	93875	39237	2824

## 6 Conclusion

In this paper four echelons, multi commodity, strategic–tactical mixed integer programming model has been proposed based on the model of Bashiri *et al.* [32] with stochastic demand and different transportation mode and lead time . A numerical example has been shown to illustrate applicability of model, such as quantity of product which is transferred between different facilities with different transportation mode, decisions about supplier selection, facility location, transportation mode selection, and capacity options. Total profit with deterministic and stochastic demand was compared.

Two different scenario and sensitivity analysis were run to show different results. There is more extension for this research. Uncertainty for other parameter such as cost with different uncertainty concept (e.g. fuzzy environment) is suggested for comparison. As it has been cleared this problem is NP-hard, more heuristic solution need to achieve the optimal solution.

## References

1. Rahimi, I., Behmanesh, R., Yusuff, R. M., (2013). A Hybrid Method for Prediction and Assessment Efficiency of Decision Making Units: Real Case Study: Iranian Poultry Farms. *International Journal of Decision Support System Technology (IJDSST)*. 5(1), 66-83.
2. Melo, M. T., Nickel, S., Saldanha-da-Gama, F., (2009). Facility location and supply chain management–A review. *European Journal of Operational Research*.196(2), 401-12.
3. Tang, S. H., Rahimi, I., Karimi, H., (2016). Objectives, products and demand requirements in integrated supply chain network design: a review. *International Journal of Industrial and Systems Engineering*, 23(2), 181-203.
4. Simchi-Levi, D., Kaminsky, P., Simchi-Levi, E., (2004.) *Managing the supply chain: the definitive guide for the business professional*: McGraw-Hill Companies.

5. Ghiani, G., Laporte, G., Musmanno, R., (2004). Introduction to logistics systems planning and control: John Wiley & Sons.
6. Santoso, T., Ahmed, S., Goetschalckx, M., Shapiro, A., (2005). A stochastic programming approach for supply chain network design under uncertainty. *European Journal of Operational Research*, 167(1), 96-115.
7. Shapiro, J., (2006). Modeling the supply chain: Cengage Learning.
8. Goyal, S., Deshmukh, S., Babu, A. S., (1990). A model for integrated procurement-production systems. *Journal of the Operational Research Society*, 1029-35.
9. Barbarosoğlu, G., Özgür, D., (1999). Hierarchical design of an integrated production and 2-echelon distribution system. *European Journal of Operational Research*, 118(3), 464-84.
10. Sabri, E. H., Beamon, B. M., (2000). A multi-objective approach to simultaneous strategic and operational planning in supply chain design. *Omega*, 28(5), 581-98.
11. Goyal, S., Deshmukh, S., Subash Babu, A., (1991). Analysis of integrated procurement—production systems using mathematical and simulation modelling approaches. *Production planning & Control*, 2(3), 257-64.
12. You, F., Grossmann, I. E., (2009). MINLP model and algorithms for optimal design of large-scale supply chain with multi-echelon inventory and risk pooling under demand uncertainty. *Computer Aided Chemical Engineering*, 27, 1983-8.
13. Tasan. A. S., (2006). A two step approach for the integrated production and distribution planning of a supply chain. *Intelligent computing: Springer*, 883-8.
14. Goyal, S., Deshmukh, S., (1997). Integrated procurement-production system in a just-in-time environment-modelling and analysis. *Production planning & Control*, 8(1), 31-6.
15. Arntzen, B. C., Brown, G. G., Harrison, T. P., Trafton, L. L., (1995). Global supply chain management at Digital Equipment Corporation. *Interfaces*, 25(1), 69-93.
16. Pirkul, H., Jayaraman, V., (1996). Production, transportation, and distribution planning in a multi-commodity tri-echelon system. *Transportation Science*, 30(4), 291-302.
17. Torabi, S. A., Hassini, E., (2008). An interactive possibilistic programming approach for multiple objective supply chain master planning. *Fuzzy Sets and Systems*, 159(2), 193-214.
18. Pirkul, H., Jayaraman, V., (1998). A multi-commodity, multi-plant, capacitated facility location problem: formulation and efficient heuristic solution. *Computers & Operations Research*, 25(10), 869-78.
19. Amiri, A., (2006). Designing a distribution network in a supply chain system: Formulation and efficient solution procedure. *European Journal of Operational Research*, 171(2), 567-76.
20. Park\*, Y., (2005). An integrated approach for production and distribution planning in supply chain management. *International Journal of Production Research*, 43(6), 1205-24.
21. Lei, L., Liu, S., Ruszczyński, A., Park, S., (2006). On the integrated production, inventory, and distribution routing problem. *IIE Transactions*, 38(11), 955-70.
22. Aghezzaf, E., (2005). Capacity planning and warehouse location in supply chains with uncertain demands. *Journal of the Operational Research Society*, 56(4), 453-62.
23. Carlsson, D., Rönnqvist, M., (2005). Supply chain management in forestry—case studies at Södra Cell AB. *European Journal of Operational Research*, 163(3), 589-616.
24. Chan, Y., Carter, W. B., Burnes, M. D., (2001). A multiple-depot, multiple-vehicle, location-routing problem with stochastically processed demands. *Computers & Operations Research*, 28(8), 803-26.
25. Guillén, G., Mele, F., Bagajewicz, M., Espuna, A., Puigjaner, L., (2005). Multiobjective supply chain design under uncertainty. *Chemical Engineering Science*, 60(6), 1535-53.
26. Cordeau, J. F., Pasin, F., Solomon, M. M., (2006). An integrated model for logistics network design. *Annals of operations Research*, 144(1), 59-82.
27. Wilhelm, W., Liang, D., Rao, B., Warrier, D., Zhu, X., Bulusu, S., (2005). Design of international assembly systems and their supply chains under NAFTA. *Transportation Research Part E: Logistics and Transportation Review*, 41(6), 467-93.

28. Sadjady, H., Davoudpour, H., (2012). Two-echelon, multi-commodity supply chain network design with mode selection, lead-times and inventory costs. *Computers & Operations Research*, 39(7), 1345-54.
29. Snyder, L. V., (2006). Facility location under uncertainty: a review. *IIE Transactions*, 38(7), 547-64.
30. Longinidis, P., Georgiadis, M. C., (2011). Integration of financial statement analysis in the optimal design of supply chain networks under demand uncertainty. *International journal of production economics*, 129(2), 262-76.
31. Baghalian, A., Rezapour, S., Farahani, R. Z., (2013). Robust supply chain network design with service level against disruptions and demand uncertainties: A real-life case. *European Journal of Operational Research*, 227(1), 199-215.
32. Bashiri, M., Badri, H., Talebi, J., (2012). A new approach to tactical and strategic planning in production–distribution networks. *Applied Mathematical Modelling*, 36(4), 1703-17.

#### Appendix A. Data generator commands

```

TPWp,tr,j,c = 1+INT(RAND()*(4-1+1))
MVp,tr=1+INT(RAND()*(3-1+1))
cap1tr,i,j=0+INT(RAND()*(20-0+1))
uc tr,i,j=0+INT(RAND()*(2-0+1))+1+INT(RAND()*(5-1+1))*SQRT('cap1tr,i,j')
mo(s,r)=10
mk(j,e)=500+INT(RAND()*(1000-500+1))
CK(i,o)=200+INT(RAND()*(500-200+1))
D(c,pt)=2000+INT(RAND()*(4000-2000+1))
b(p,r)=1+INT(RAND()*(3-1+1))
Ai,j=10+INT(RAND()*(15-10+1))
ps(r,s)=5+INT(RAND()*(10-5+1))
co(o,i)=0+INT(RAND()*(90-0+1))+100+INT(RAND()*(500-100+1))
cu(o,i)=0+INT(RAND()*(20-0+1))+10+INT(RAND()*(100-10+1))
col(e,j)=0+INT(RAND()*(90-0+1))+100+INT(RAND()*(110-100+1))
cul(e,j)=0+INT(RAND()*(20-0+1))+100+INT(RAND()*(110-100+1))
CP p,i=10+INT(RAND()*(20-10+1))
CS p,j=2+INT(RAND()*(5-2+1))
CT p,i,j=1+INT(RAND()*(3-1+1))
CD r,s,i=1+INT(RAND()*(3-1+1))
CF1 p,j,c=1+INT(RAND()*(3-1+1))
rs1(t,s,r)=10000+INT(RAND()*(20000-10000+1))

```